
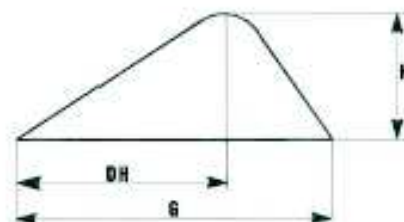


### S60-43° DUST SUPPRESSION

Sprinklers are designed to spray dusty heaps.

The "Dust" protects the moving parts so as to allow the device to work in severe conditions. On special request, individual solutions are possible, such as oxidation-resistant stainless steel nozzles.

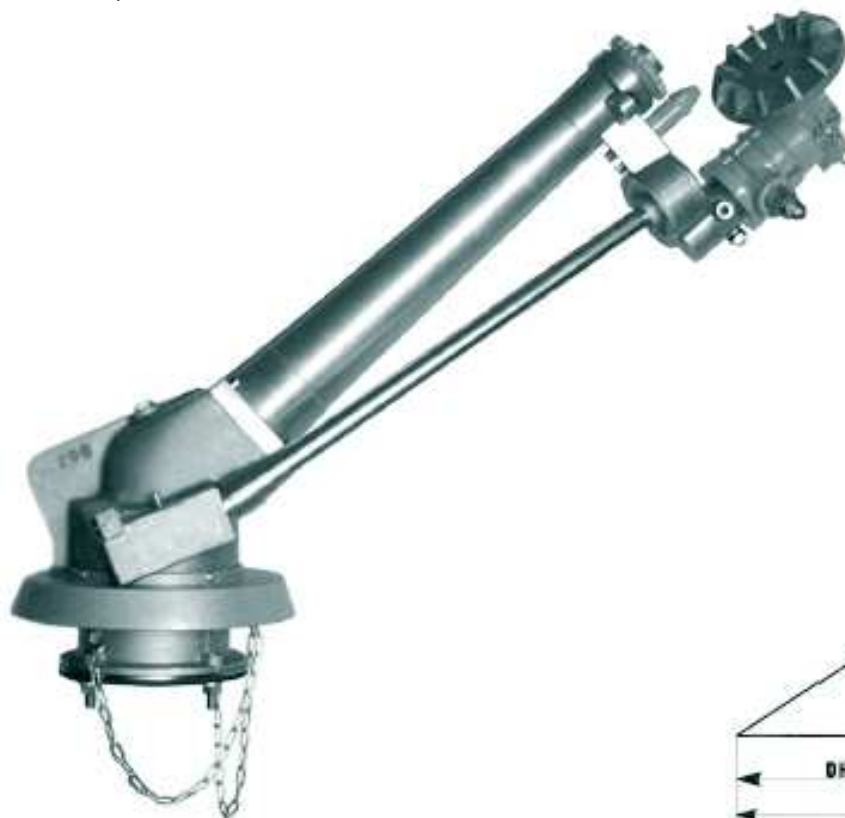

\* DH = Distanza tra irrigatore e apogeo  
Distance from sprinkler to apogee

Boccaglio Nozzle Ø mm	Pressione Pressure atm.	Portata Discharge l/min	Gittata G Length of jet G m	Apogeo H Apogee H m	Distanza DH* Distance DH* m
20	3,0 - 4,0 - 5,0	440 - 506 - 566	37 - 41 - 44	11 - 14 - 17	22 - 26 - 29
22	3,0 - 4,0 - 5,0	530 - 612 - 684	38 - 42 - 45	12 - 15 - 18	23 - 27 - 30
24	4,0 - 5,0 - 6,0	729 - 816 - 895	44 - 48 - 51	16,5 - 18 - 20	28 - 32 - 36
26	4,0 - 5,0 - 6,0	857 - 957 - 1050	46 - 50 - 52	16,5 - 18,5 - 20,5	30 - 33 - 36
28	4,0 - 5,0 - 6,0	994 - 1110 - 1220	48 - 51 - 54	17 - 19 - 21,5	31 - 34 - 37
30	5,0 - 6,0 - 7,0	1273 - 1394 - 1513	55 - 62 - 64	21 - 23 - 25	39 - 43 - 45

I dati tecnici sono orientativi e non impegnativi  
The technical characteristics are indicative and not binding

Disponibile anche con attacco 2" BSP / Also available with 2" BSP connection