


TURBINE SPRINKLER

S70-43° DUST SUPPRESSION

Sprinklers are designed to spray dusty heaps.

The "Dust" protects the moving parts so as to allow the device to work in severe conditions. On special request, individual solutions are possible, such as oxidation-resistant stainless steel nozzles.

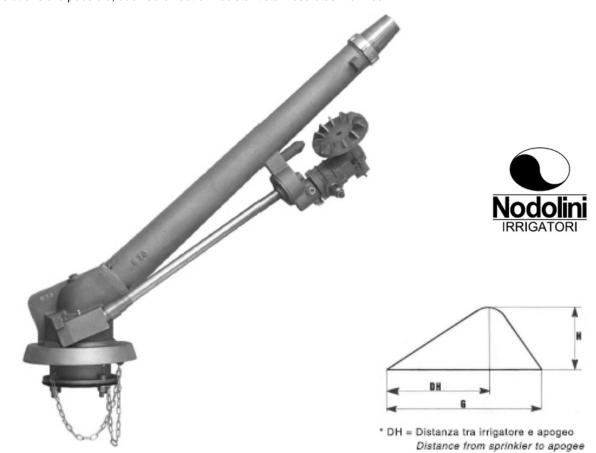

| Boccaglio Nozzle Ø mm | Pressione Pressure atm. | Portata <i>Discharge</i> I/min | Gittata G Lenght of jet G m | Apogeo H Apogee H m | Distanza DH* Distance DH* m |
|-----------------------------|-------------------------------|--------------------------------------|-----------------------------------|---------------------------|-----------------------------------|
| 26 | 4,0 - 5,0 - 6,0 | 860 - 957 - 1060 | 47 - 51 - 53 | 17 - 19 - 21 | 31 - 35 - 37 |
| 28 | 4,0 - 5,0 - 6,0 | 997 - 1110 - 1225 | 49 - 54 - 57 | 18 - 22 - 25 | 32 - 38 - 40 |
| 30 | 5,0 - 6,0 - 7,0 | 1273 - 1394 - 1520 | 56 - 57 - 58 | 21 - 24 - 26 | 39 - 40 - 41 |
| 32 | 5,0 - 6,0 - 7,0 | 1475 - 1587 - 1735 | 61 - 63 - 66 | 22 - 25 - 27 | 40 - 42 - 43 |
| 34 | 5,0 - 6,0 - 7,0 | 1645 - 1792 - 1935 | 62 - 64 - 67 | 23 - 25.5 - 27.5 | 41 - 43 - 44 |
| 36 | 6,0 - 7,0 - 8,0 | 2008 - 2169 - 2316 | 68 - 71 - 73 | 25 - 29.5 - 34 | 48 - 50 - 53 |

I dati tecnici sono orientativi e non impegnativi

Disponibile anche con attacco 2" 1/2 BSP / Also available with 2" 1/2 BSP connection

The technical characteristics are indicative and not binding