CATALOGUE CARD

od 1981r. grupa aqua

TURBINE SPRINKLER

S80 SUPER-43° DUST SUPPRESSION

Sprinklers are designed to spray dusty heaps.

The "Dust" protects the moving parts so as to allow the device to work in severe conditions. On special request, individual solutions are possible, such as oxidation-resistant stainless steel nozzles.

Nodolini
IRRIGATORI

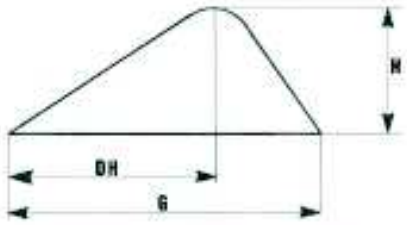

* DH = Distanza tra irrigatore e apogeo
Distance from sprinkler to apogee

Boccaglio *Nozzle* Ø mm	Pressione *Pressure* atm.	Portata *Discharge* l/min	Gittata G *Lenght of jet G* m	Apogeo H *Apogee H* m	Distanza DH* *Distance DH** m
26	4,0 - 5,0 - 6,0	860 - 957 - 1060	47 - 52 - 54	17 - 19,5 - 21	31 - 36 - 38
28	4,0 - 5,0 - 6,0	997 - 1110 - 1225	49 - 55 - 58	18 - 22 - 25	32 - 39 - 41
30	5,0 - 6,0 - 7,0	1273 - 1394 - 1520	56 - 59 - 61	21 - 24 - 26	39 - 41 - 43
32	5,0 - 6,0 - 7,0	1475 - 1587 - 1735	61 - 63 - 67	22 - 25 - 27	40 - 42 - 44
34	5,0 - 6,0 - 7,0	1645 - 1792 - 1935	62 - 64 - 69	23 - 25,5 - 28	41 - 43 - 46
36	6,0 - 7,0 - 8,0	2008 - 2169 - 2316	68 - 71 - 74	25 - 29,5 - 33	46 - 48 - 51
38	7,0 - 8,0 - 9,0	2418 - 2585 - 2742	73 - 77 - 80	31 - 34 - 36	51 - 54 - 56

I dati tecnici sono orientativi e non impegnativi
The technical characteristics are indicative and not binding